

EGYPT



Source: esri

General

Egypt - officially the Arab Republic of Egypt - is a transcontinental country spanning the northeast corner of Africa and southwest corner of Asia by a land bridge formed by the Sinai Peninsula. Egypt is a Mediterranean country bordered by the Gaza Strip and Israel in the Northeast, the Gulf of Aqaba in the East, the Red Sea in the East and South, Sudan in the South, and Libya in the West.

With a population in 2020 of 102 million, Egypt is the most populous country in North Africa and the Arab world and the third-most populous in Africa (after Nigeria and Ethiopia). The great majority of its people live near the banks of the Nile River, an area of about 4.0 Mha (million hectares), which implies 25.5 persons per ha. However, counted over the whole area of the country it is 1.0 person per ha (Wikipedia and United Nations, 2019).

Climate and geography

Apart from the Nile Valley, the majority of Egypt's landscape is desert, with a few oases scattered about. Winds create prolific sand dunes that peak at more than 30 m high. Egypt includes parts of the Sahara Desert and of the Libyan Desert (source: Wikipedia).

Historic polder development

Biswas (1972) stated that the reclamation works of King Men (or Menes) form an example of ancient impoldering activities. He describes that King Men ruled Egypt around 3400 BC, was the founder of the Egyptian dynasties and can be considered the first Pharaoh. He united Upper and Lower Egypt, which resulted in a large increase in prosperity. He built his new capital at Memphis on the old fertile riverbed, for which, according to the historian Herodotus, he constructed a dam in the river Nile some 20 km south of Memphis at Kosheish. The course of the river was diverted to a canal, which was excavated between two hills. The dam is supposed to have had a maximum height of 15 m and a length of some 450 m. In a later stage King Men excavated a lake northwest of the new town and dug a canal to connect it with River Nile. The system of watercourses, viz. the lake, the canal, and the river, served as a moat to protect him from his enemies. The dam had to be guarded and maintained carefully, because in case of a breach the entire city of Memphis would have been flooded. When Herodotus visited Egypt some 2,500 years later, the dam was still guarded with greatest care by the Persians (Biswas, 1972).

Wolters *et al.* (1986) state that large scale basin irrigation first started under King Men and that the basins of this type of irrigation are regarded as the first polders of the world. However, they also state that it may be debatable whether this indeed were polders in the true sense.

In the Ptolemaic and Roman periods lowlands in the North of the delta were cultivated. The British Engineer Sir William Willcocks (1913) stated that the presence of Pharaonic summer canals and dikes suggests that these lands were once covered with vineyards and enormous basins planted with wheat, maintaining a dense population. It also can be supposed that basin irrigation in these coastal areas was combined with a rudimentary form of aquaculture. Although it later became barren lands the many mounds, strewn with bricks and pottery', also called 'turtle backs', observed by Willcocks testify of a rich history. There are several archeological sites in this area, with villages located on mounds (*kom*), such as: Kom Khazm, Kom Om Ghafer, Kom El-Khanzera, Kom El-Khaloulid and Kom Zabaa.

Basin irrigation, using the low flow and high flow of the Nile, was for millennia the dominant irrigation method in Egypt. With the introduction around 1820 of cotton and sugarcane, perennial irrigation was established and, from 1826 onwards, under the rule of Mohammed Ali, Egypt developed a system of canals for the irrigation of Lower Egypt. As a result, the discharge entering the lakes decreased and some land fell out of cultivation. Later on, the government constructed a series of

(*kharigeen*) villages, which were settled around 1989 along the Halafy and Ghabat canals. The graduates received between 1.7 to 2.1 ha (4 to 5 feddan) of land.

Most of the lands in the northern part of the Nile Delta were reclaimed relatively recently. Probably in the 1940s or 1950s, the Moheet Drain was dug to mark the limit of the cultivated area and to drain the excess water from the tail of the Meet Yazid irrigated area. Subsequently, in a second phase the northern areas of Meet Yazid irrigated area were reclaimed. The districts of El Riyad and Sidi Salim were developed during the Nasser regime (1956-1970), while the Sidi Ghazi District (to the East) was developed in the 1970s with Yugoslavian cooperation (Figure 2). Most of these areas were reclaimed with the idea of developing a Soviet style state or collective farms and large-scale pumping stations were constructed to irrigate large tracks of land. However, this idea was dropped during the 1970s, after Nasser's death, after which these farms disaggregated into different forms of land holding. In the 1980s in Sidi Ghazi district, some land was offered to would-be reclaimers: these had to form a 'cooperative' of at least 100 persons to which a large track of land was sold (in one instance 105 farmers received 2940 ha (7000 feddan) and each received a plot of approximately 29.4 ha (70 feddan) allocated through a 'lucky draw'). This partly explains the existence of quite large fish farms in the area.

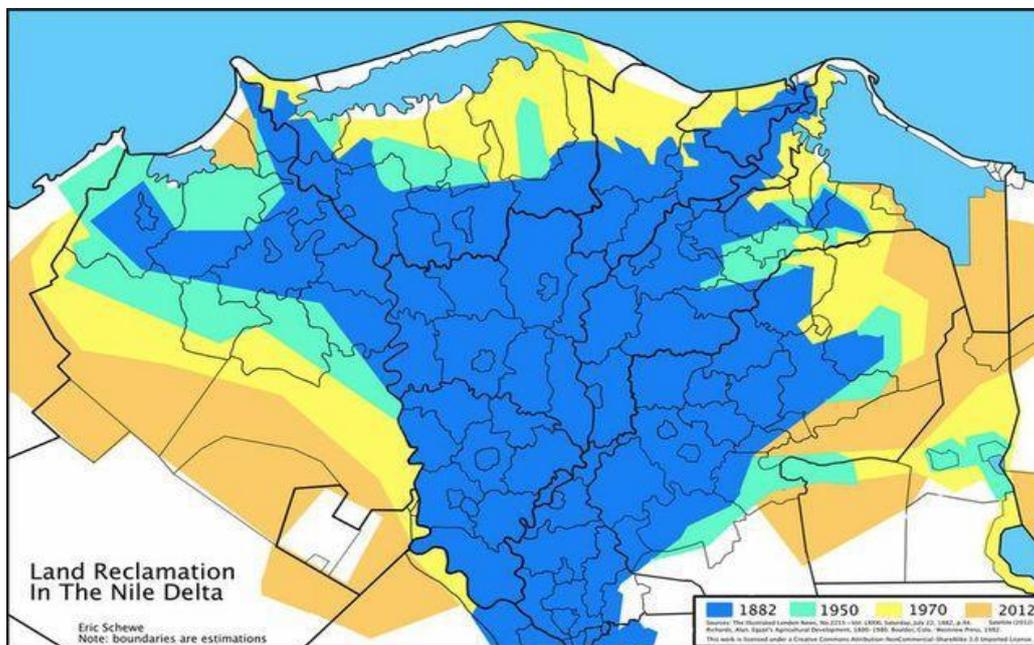


Figure 2. Agricultural land expansion in the Nile Delta
(Australian Agency for International Development (AusAID) et al., 2013)

With the raising of the Aswan dam, 85% of the agricultural lands in Egypt at that time came to be cultivable under perennial irrigation. The conversion of the remaining lands was achieved after the closure of the High Aswan Dam in 1964 and its inauguration in 1970. The construction and adaptation of a complex canal network in the Nile Delta enabled the expansion of agriculture towards the coastal zone and year-round irrigation (Ayache *et al.*, 2009). These infrastructural interventions changed the regime of the river from a seasonally variable discharge to a much more constant and controlled flow containing a negligible sediment load.

After the construction and extension of irrigation canals and partial reclamation during the 1960s, agriculture was not possible at the onset because of the high salinity of the coastal soils, the unreliability of water supply and lack of drains. Because of the long process of annual inundations and the leaching of saline soils, land owners were aware of the beneficial aspects of applying water on land. During the first years land plots were flooded with canal water in order to leach the salts. Farmers realized that they could also use fish ponds and mullet farming for this (Radwan, 2008). So, the advance of the agricultural frontier benefited from aquaculture to develop the land. For example, along the Daramally and Halafy branch canals in the Sidi Ghazi Irrigation District, the former graduate settlers, (*kharigeen*) farmers, acknowledge that *in the beginning you needed three years of intensive*

soil-washing before being able to cultivate rice or cotton; fish farming was therefore widespread. This fish farming continued to be practised until a ministerial decree prohibited the *kharigeen* farmers to continue with it, with the sanction of losing the land that the government had allotted to them. Also along the Ghabat Canal, the land has improved under the fish farming and the originally saline soils became suitable to cultivate wheat. In contrast, on Mares El Gamal Canal (as in other parts), some farmers started fish farming later, because of the salinity of the soil and the poor yields. Twenty five years of fish farming improved the soil, thereafter they could use it for agriculture. Aquaculture thus enhanced the conversion of these reclaimed lands to agricultural exploitation and, hence, contributed to the advance of irrigated agriculture (Australian Agency for International Development (AusAID) *et al.*, 2013).

One of the most important productive areas for aquaculture lies on the northern coastline, in the Kafr El Sheikh Governorate (Macfadyen, 2011). The vast majority (86%) of aquaculture production depends on brackish rather than fresh water (Sacchi, 2011). Aquaculture benefits in this area from two main sources of brackish water: the brackish water of the Burullus Lake and the reuse of agricultural drainage water from the Meet Yazid irrigated area and the Nile Delta. These two sources of brackish water enabled the expansion of aquaculture in the region.

The Group Polder Development (1982) describes that the Northern Fringe of the Nile Delta is partly below mean sea level (1 to 2 m-MSL). Some dikes have been constructed to protect these low-lying areas against flooding from the sea and the rivers (Figure 1).

Wolters *et al.* (1986) describe that the Nile Delta contains many polders, with a total area of 1.14 Mha and mention that the Nile Delta can be divided in 70 drainage basins. They also mention that the drainage water of lower lying areas is pumped into free flowing main drains, mostly with an outfall in a coastal lake (Figure 3).

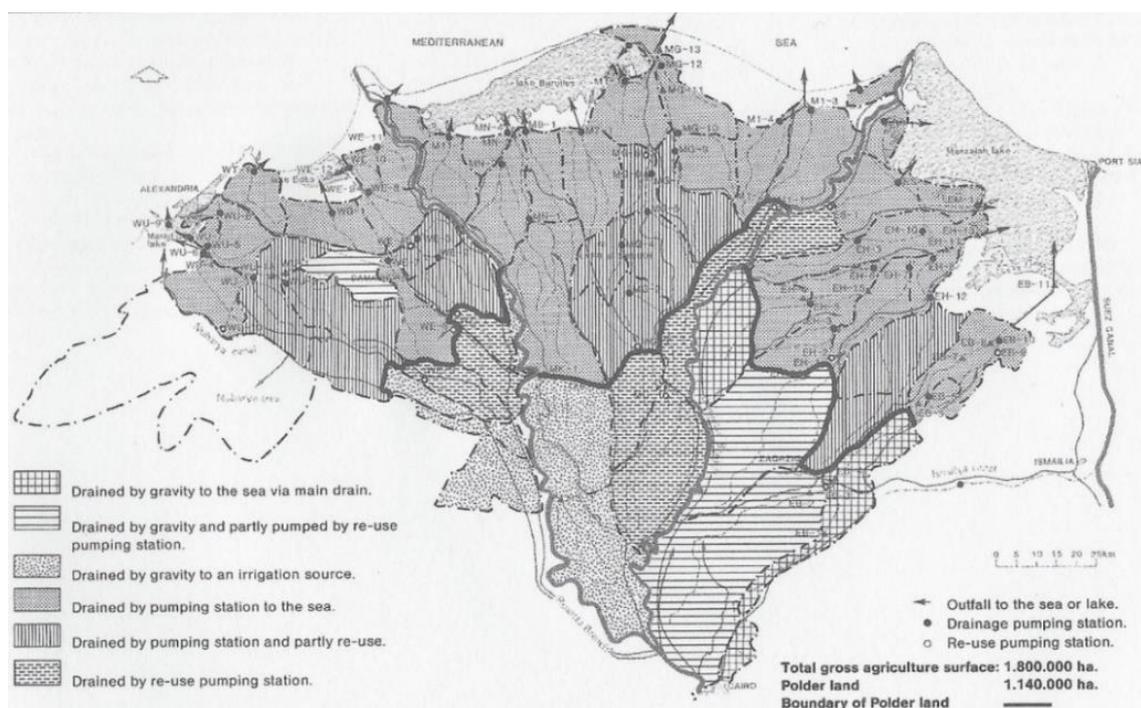


Figure 3. Polders in the Nile Delta and the drainage basins of the delta with their drainage system (Wolters *et al.*, 1986)

The Centre for Civil Engineering Research and Codes (CUR) and Ministry of Transport, Public Works and Water management (1993) gave a good overview of the development of the Nile Delta. From this overview it can be derived that the total net irrigated area is 1.61 Mha (total gross area of the delta is 1.98 Mha). They stated that because of the required drainage the Nile Delta has been subdivided into a few hundred drainage basins. With respect to this it has to be noticed that the 70 drainage basins as mentioned by Wolters *et al.* (1986) seems to be a more accurate figure. The drainage water has to be lifted between 1 to 3 m from the open drains to an outfall drain. The outfall

drain conveys the water to one of the four lakes near the Mediterranean, or directly to the sea either as a freely flowing drain or via a pumping station. The outfall drains also receive water from upstream higher areas in the South where the open drains can discharge by gravity into the outfall drains.

The Centre for Civil Engineering Research and Codes (CUR) and Ministry of Transport, Public Works and Water management (1993) also mention that in 1988, the pump-lift system consisted of 70 pumping stations with a total capacity of 1,300 m³/s corresponding to an average drainage capacity of 8 mm/day. This figure seems to be in line with the 70 drainage basins as mentioned by Wolters *et al.* (1986). In the files of Prof. Adriaan Volker there are three relevant maps on the Nile Delta. These maps are: topographic map of the Nile Delta with the elevation in feet (Figure 4), drainage units in the Nile Delta (Figure 5) and drains in the Nile Delta (Figure 6).



Figure 4. Topographic map of the Nile Delta - 1982 - with the elevation in feet

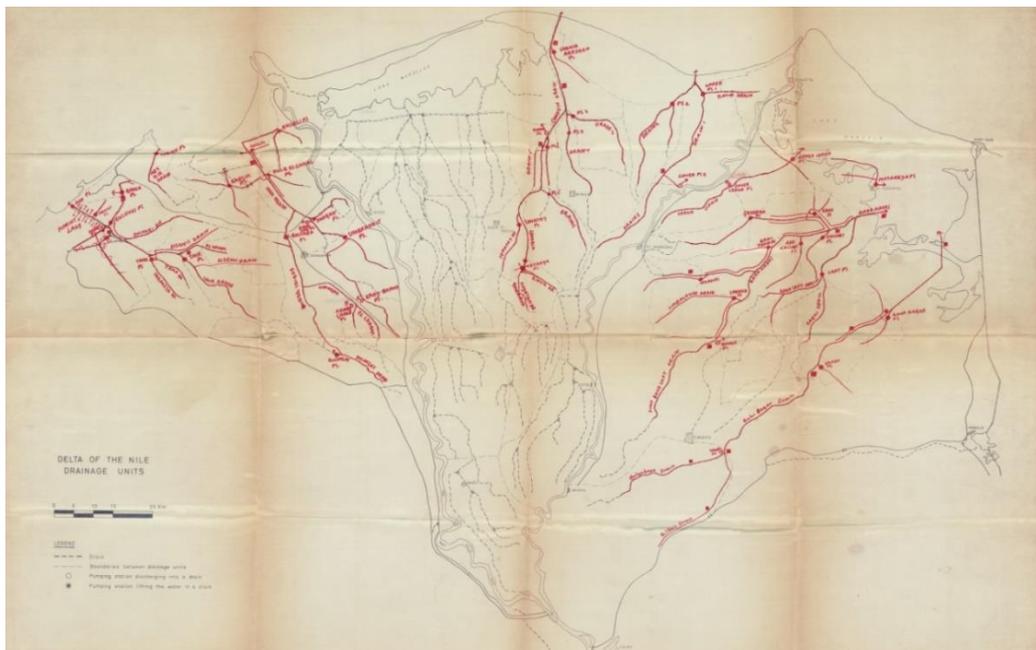


Figure 5. Drainage units in the Nile Delta

A map prepared by the Drainage Research Institute shows the main drainage pumping stations in the Nile Delta (Figure 7).

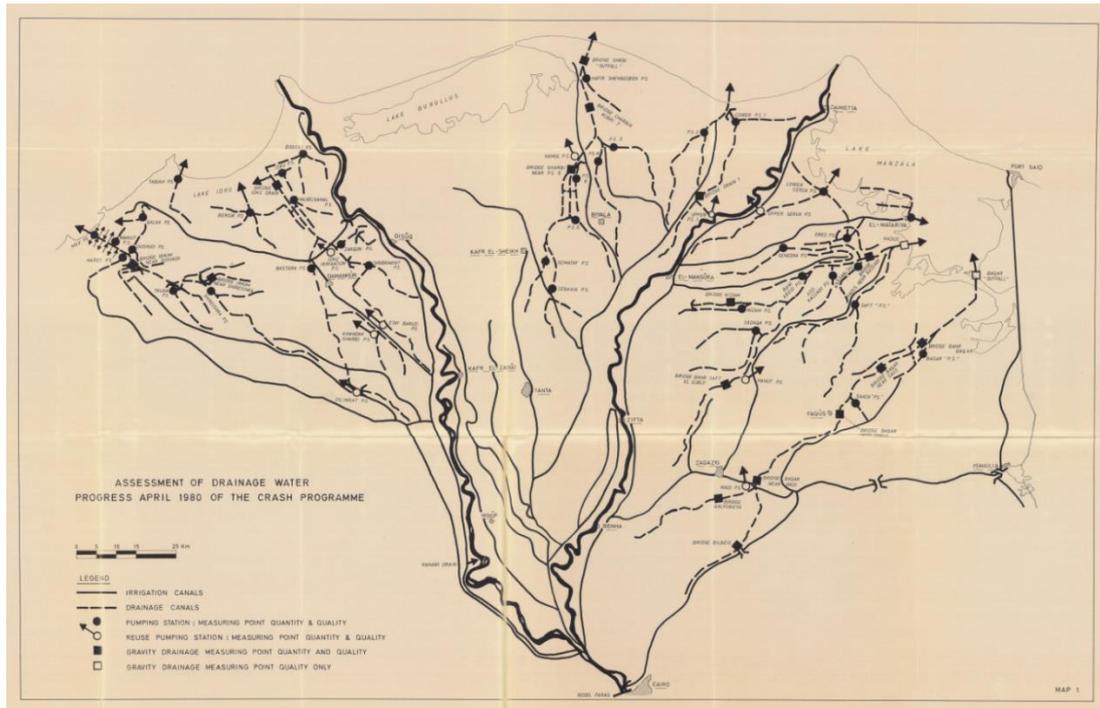


Figure 6. Drains in the Nile Delta - 1980

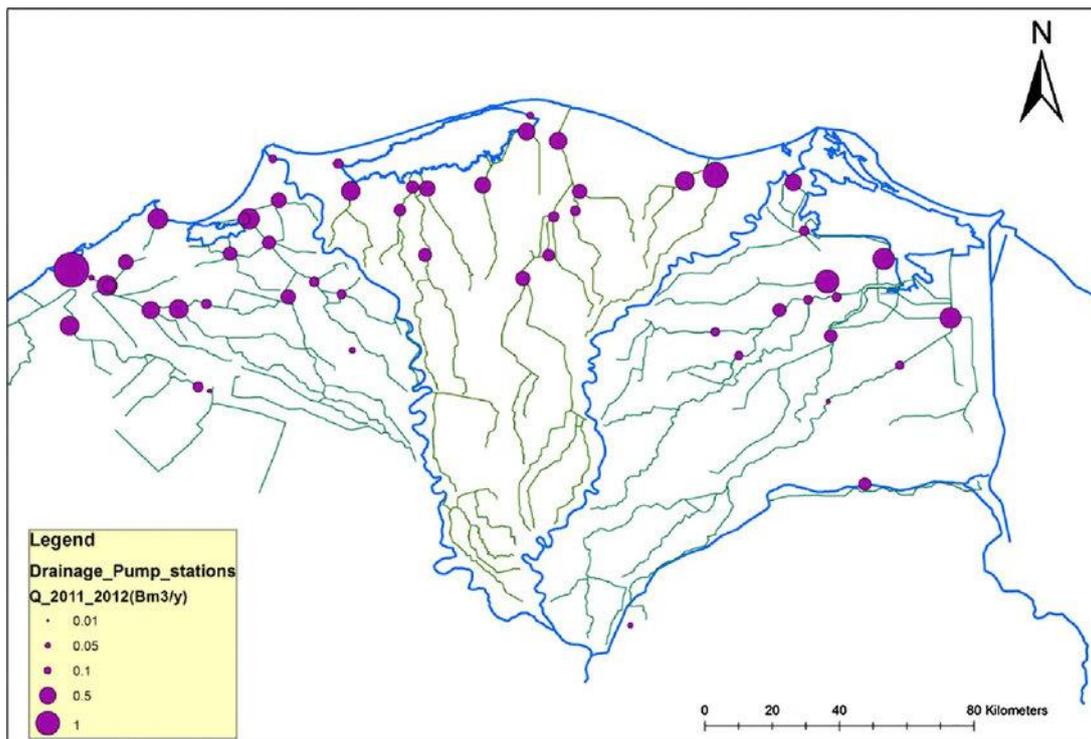


Figure 7. Main drainage pumping stations and their capacities in the Nile Delta (source: Drianage Research Institute)

Existing polders

In several publications references to specific polders were found. Information on these polders is given underneath.

Reclaimed land in the former Lake Abou Qir (or Aboukir), about 12,000 ha. The first mention of a polder in the true sense might have been the reclamation of almost the entire Lake Abou Qir in 1887 (Group Polder Development, 1982), located along the Mediterranean coast (Figure 8).



Figure 8. Reclaimed land (about 12,000 ha) in the former Lake Abu Qir (map Google Earth)

El-Max area. In the publication by the Australian Agency for International Development (AusAID) *et al.* (2013) it is stated that the first drainage pumping station was constructed in 1898 at the El-Max area near Alexandria to drain about 89,000 ha (212,000 feddan).

Mansour and Zawia polders, 27,300 ha. These polders were reclaimed in the 1960s in the eastern part of Burullus Lake. Agriculture still suffers from high salinity (Group Polder Development, 1982) (Figure 9).



Figure 9. Area in which the Mansour and Zawia polders are located (in total 27,300 ha) (map Google Earth)

Burullus Lake is one of Egypt's most important wetlands and its second largest lake, where the Meet Yazid irrigated area drains its waters to. The lake itself was separated from agricultural land by seasonally flooded marshlands that have now been reclaimed (Figure 10). This is a wetland of significance for fish habitats and migratory birds under the RAMSAR convention. The lake is a declared natural protectorate. Most of the water it receives is intensively used and reused agricultural, aquaculture and domestic water. In sum, this populated coastal zone constitutes a transition between highly productive agriculture and aquaculture with the lake area, which is acknowledged for its ecological value. This presents a number of water quantity, - quality and environmental issues and complexities.

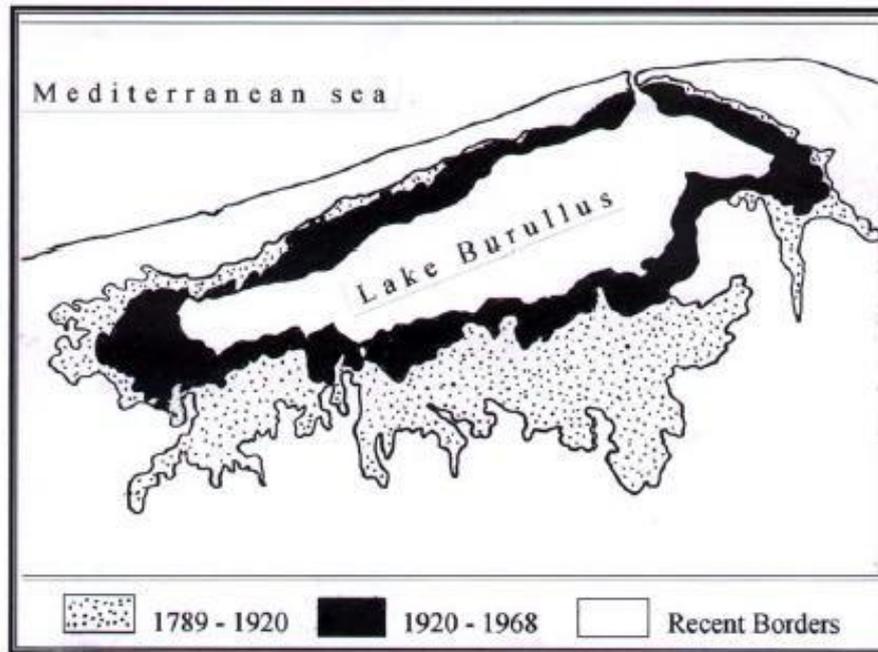


Figure 10. Changes in the size of Burullus Lake
(Australian Agency for International Development (AusAID) et al., 2013)

Reclaimed land in Lake Mariout, Aebis Project, 10,000 ha. Lake Mariout covers about 26,000 ha. Due to a fall of the water level by 3 metres large parts of the lake fell dry. A dike has been constructed and a drainage pumping station has been installed (Figure 11) (Group Polder Development, 1982).



Figure 11. Reclaimed land (10,000 ha) in Lake Mariout, Aebis Project (map Google Earth)

Reclaimed land in Lake Idku (or Edko), 1600 ha. According to the Group Polder Development (1982) an area of 18,000 ha can still be reclaimed (Figure 12).

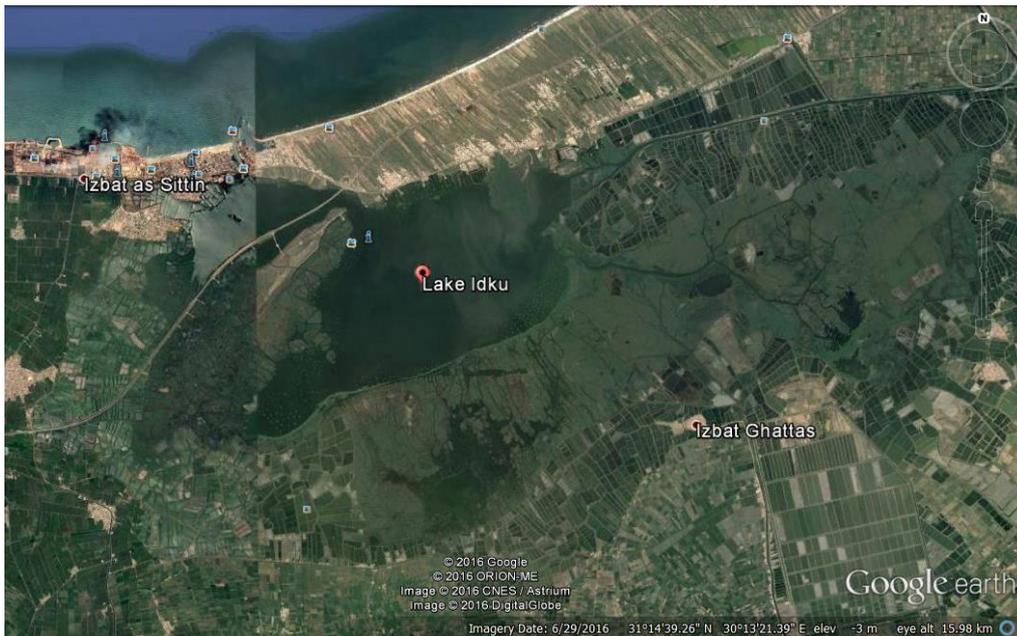


Figure 12. Reclaimed land (about 1600 ha) in Lake Idku (map Google Earth)

Reclaimed land around Lake Manzala, 100 ha. The 100 ha is a pilot polder near the western shore of Lake Manzala (Figure 13). According to the Group Polder Development (1982) a large area near Lake Mansala can still be impoldered.

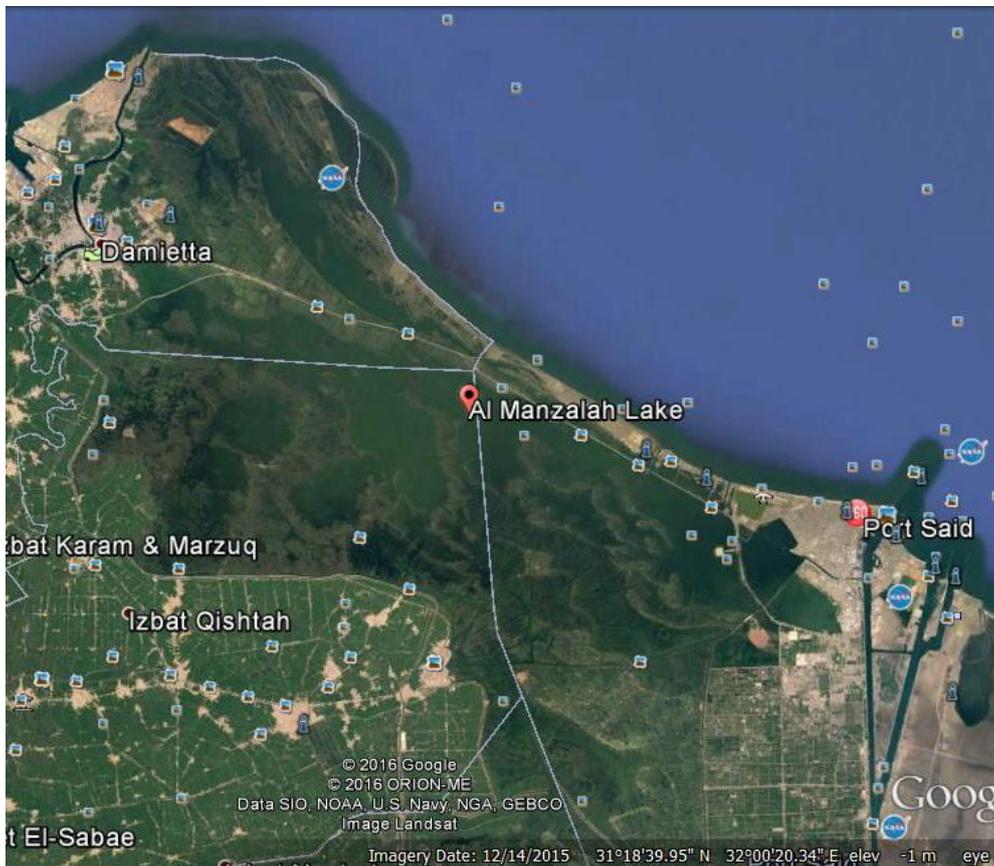


Figure 13. Reclaimed land (100 ha) around Lake Manzala (map Google Earth)

Diab (1983) gives information on the dimensions of the drainage systems in the polder areas (Figure 14). These are:

- *field drains*. Spacing 25 m, depth 1 m;
- *secondary drains*. Perpendicular to field drains, depth 1.2 – 1.4 m;
- *collector drains*. Perpendicular to secondary drains, depth 1.6 – 1.8 m;
- *main drains*. Perpendicular to the collector drains. The water level in the main drains never exceeds the bottom of the collector drains.

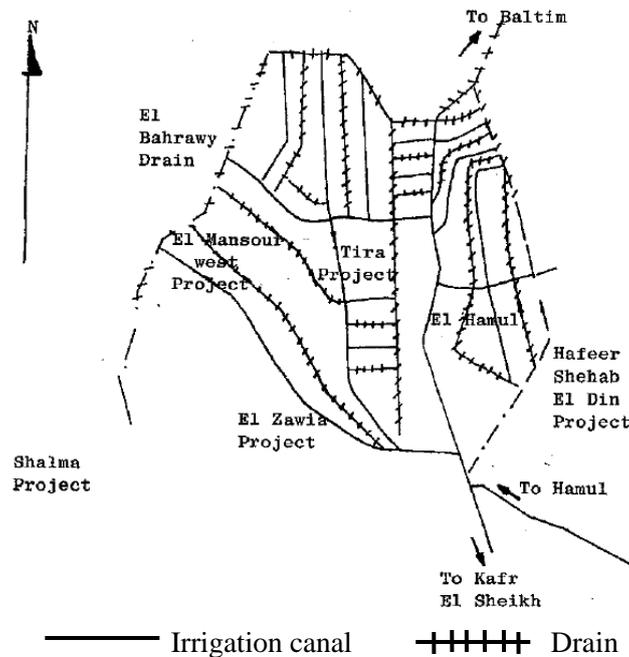


Figure 14. Irrigation canals and drains at polder localities in the North Delta (Diab, 1983)

General characteristics of existing polders in Egypt are shown in Table I.

Proposed polders

So far no proposed polders could be identified.

References

- Amer, M.H. Egypt's water vision for the 21st Century
- Amer, M.H. and N.A. de Ridder (eds), 1989, Land Drainage in Egypt, Drainage Research Institute, Cairo, Egypt.
- Assen, J.H., 1986. Land-reclamation in Egypt. Land+Water International, 58/1986.
- Australian Agency for International Development (AusAID), National Water Research Centre (NWRC) and International Water Management Institute (IWMI), 2013. An exploratory survey of water management in the Meet Yazid Canal command area of the Nile Delta. Colombo, Sri Lanka.
- Ayache, F., J.R. Thompson, R.J. Flower, A. Boujarra, F. Rouatbi and H. Makina, 2009. Environmental characteristics, landscape history and pressures on three coastal lagoons in the Southern Mediterranean Region: Merja Zerga (Morocco), Ghar El Melh (Tunisia) and Lake Manzala (Egypt). *Hydrobiologia* 622 (1): 15-43.
- Biswas, A.K., 1972. History of hydrology, 2nd edition. North-Holland Publishing Company, Amsterdam, the Netherlands
- Boumans, J.H. and A.M. Mashali, 1983. Seepage from Lake Burullus into the reclaimed Mansour and Zawia polder area. *Agricultural Water management*. Volume 7, Issue 4.

- Brown, R.H., 1902. The Delta Barrage of Lower Egypt. National Printing Department, Cairo, Egypt
Centre for Civil Engineering Research and Codes (CUR) and Ministry of Transport, Public Works and Water management, 1993. Hydrology and water management of deltaic areas. CUR report 93-5. Gouda, the Netherlands
- Diab, M. Sh., 1983. Polder areas of northern localities of the Nile Delta. In: Proceedings International Symposium 'Polders of the World'. International Institute for Land Reclamation and Improvement, Wageningen, the Netherlands.
- Group Polder Development, Department of Civil Engineering, Delft University of Technology. Polders of the World, 1982. Compendium of polder projects. Delft, the Netherlands
- Hanna, F. and M.A.G. Osman, 1995. Agricultural land resources and the future of land reclamation and development in Egypt. In: T.A. Hakim (ed.). Egyptian agriculture profile. Centre International de Hautes Études Agronomiques Méditerranéennes. Montpellier, France.
- Kiepert, H., 1859. Atlas Antiquus. Berlin, Germany (in German).
- Macfadyen, G., Graeme Macfadyen, Ahmed Mohamed Nasr Allah, Diaa Abdel Reheem Kenawy, Mohamed Fathi Mohamed Ahmed, Hussien Hebicha, Ahmed Diab, Samy Mohamed Hussein, Ramadan Mohamed Abouzied, and Gamal El Naggar., 2011. Value-chain analysis of Egyptian Aquaculture. Project report 2011 - 54. The World Fish Centre. Penang, Malaysia.
- Ministry of Development and Governate of Kafr el Sheikh, 1984. Lake Burullus area development project (first stage) – final report. Ifagraria Roma. Roma, Italy.
- Radwan, I., 2008. Tilapia in the Nile Delta 1990-2008. In: Proceedings of the 8th International Symposium on Tilapia in Aquaculture, October 12-14, 2008: 605-611. Cairo, Egypt.
- United Nations, Department of Economic and Social Affairs, Population Division. 2019. World Population Prospects, medium prognosis. The 2019 revision. New York, USA.
- Volker, A., 1987. The future of Lake Manzala. Impacts of land and water development on the water and salt balance. Mission report, January 1987.
- Voll, S., 1980. Egyptian land reclamation since the revolution. Middle East Journal (34)
- Willcocks, W. and J.I. Craig, 1913. Egyptian irrigation. E. & F.N. Spon and Spon & Chamberlain. London, United Kingdom and New York, USA.
- Wolters, W., H.P. Ritzema and M. Maaskant, 1986. Polders in Egypt. Land+Water International, 58/1986.

Note: the Faiyum oasis is at 40 m-MSL. However, no polders could be identified here.

Bart Schultz

Lelystad, November 2020

Table I. General characteristics of existing polders in Egypt

Name	Reclamation	Area in ha	Type *)	Latitudes	Longitudes	Elevation in m+MSL	Land use
Reclaimed land in Lake Abou Qir	1887	12,000	DL	31° 19' N	30° 04' E	0	Agriculture
El-Max area	1898	98,000	RLL				Agriculture
Several reclamations	1932 - 1952	84,000	RLL				Agriculture
Mansour and Zawia polders	1960's	27,300	DL	31°33' N	30° 01' E	-2	Agriculture
Reclaimed land in Lake Mariut		10,000	DL	31°09' N	29° 54' E	-2	Agriculture
Reclaimed land in Lake Idku		1,600	DL	31°19' N	30° 16' E	-1	Agriculture
Reclaimed area around Lake Manzala		100	DL	31°20' N	32° 02' E	0	Agriculture
Other polders in the Nile Delta		907,000					
Total		1,140,000					Agriculture

*) RLL = reclaimed low-lying land; LGS = land gained on the sea; DL = drained lake